

# A Combinatorial Algorithm for Fuzzy Parameter Estimation with Application to Uncertain Measurements

M. Danesh<sup>1\*</sup> and S. Danesh<sup>2</sup>

1. Buein Zahra Technical University, Buein Zahra, Ghazvin, Iran.

2. Young Researchers and Elite Club, East Tehran Branch, Islamic Azad University, Tehran, Iran.

Received 08 July 2019; Revised 31 March 2020; Accepted 28 April 2020

\*Corresponding author: danesh@bzte.ac.ir (M. Danesh).

## Abstract

In this paper, we present a new method for the regression model prediction in an uncertain environment. In the practical engineering problems, to develop the regression or the artificial neural network model for making predictions, an average set of the repeated observed values is introduced to the model as an input variable. Therefore, the estimated response of the process is also the average of a set of output values, where the variation around the mean is not determinate. However, to provide the unbiased and precise estimations, the predictions are required to be correct, on average, and the spread of data should be specified. In order to address this issue, we propose a method based on the fuzzy inference system, and the genetic and linear programming algorithms. We consider the crisp inputs and the symmetrical triangular fuzzy output. The proposed algorithm is applied to fit the fuzzy regression model. In addition, we apply a simulation example and a practical example in the field of machining process in order to assess the performance of the proposed method in dealing with the practical problems in which the output variables have the natures of uncertainty and impression. Finally, we compare the performance of the proposed method with other available methods. Based on the provided examples, the proposed method is verified for prediction. The results obtained show that the proposed method reduces the error values to a minimum level, and it is more accurate than the linear programming method and the fuzzy weights with linear programming method.

**Keywords:** *Fuzzy Regression, Linear Programming, Machining Process, Adaptive Neuro-fuzzy Inference System, Genetic Algorithm.*

## 1. Introduction

In many practical engineering problems, the measured output parameters are not unique. Thus in order to facilitate the modeling of data, it is common to use the average of the measured numbers. Therefore, the predicted outputs are calculated on the basis of the average values without considering the dispersion of the dataset. Furthermore, the average values are very sensitive to outliers.

The fuzzy logic and fuzzy systems are one of the ways available to address uncertainty in engineering applications. The variations in the variable around the average values could be represented using fuzzy logic. There are many inexact optimization methods, the most important

of which are stochastic mathematical programming (SMP), fuzzy mathematical programming (FMP), and interval linear programming (ILP). They have been developed to tackle the uncertainties. FMP has a lower data requirement but reflects a more flexible information in practical applications because the related membership functions are more easily defined [1].

The linear model of fuzzy regression analysis, established by Tanaka *et al.*, has enabled the fuzzy system to give the fuzzy output [2]. In the Tanaka's research work, a fuzzy functional relationship has been given between the explanatory variables and response variables in

the fuzzy regression model. In the fuzzy linear programming problems, known as the FFLP problems, all the parameters as well as the variables are represented by fuzzy numbers [3].

Lotfi et al. have discussed an FFLP problem in which all parameters and variables are triangular fuzzy numbers. They used the concept of the symmetric triangular fuzzy number and introduced an approach to defuzzify a general fuzzy quantity [4]. Kumar *et al.* have pointed out the shortcomings of the existing methods [4], and to overcome these issues, they proposed a method with equality constraints to find the fuzzy optimal solution to the FFLP problems. Goudarzi *et al.* have discussed a fully fuzzy mixed integer linear programming problem and presented a solving method [5].

Several fuzzy regression techniques such as linear programming (LP) and quadratic programming (QP) have been proposed based on the fuzzy least squares (FLS) and mathematical programming methods that minimize the total spread of the output. The FLS and LP methods have been proposed by Diamond [6] and Tanaka *et al.* (see [6-8]), respectively. For the fuzzy linear regression problem, several variants of the FLS (see [9-11]) and LP methods (see [12, 13]) have been applied. In the fuzzy literature, several extensions of these methods have been proposed. In order to obtain the fuzzy output, Danesh *et al.* [5, 8] have used the LP and FLS methods to optimize the consequent parameters in the hybrid algorithm of the adaptive neuro-fuzzy inference system (ANFIS). A large number of research works have been carried out on the application of ANFIS modelling to uncertainty environments [14-16].

However, there have been few attempts on the application of ANFIS with the fuzzy output. In this work, we propose a new algorithm to reduce the error of the fuzzy regression model. In this algorithm, we use the fuzzy inference system and the genetic algorithm to optimize the premise parameters. Also in the proposed algorithm, LP is used for the consequence of parameter prediction. In the ANFIS method, the output is crisp. Hence using the proposed algorithm, we can employ the adaptive neuro-fuzzy inference system method for both the crisp inputs and the symmetrical triangular fuzzy output. This algorithm is compared with the method proposed by Danesh [9], which is based on the adaptive fuzzy

inference system and the fuzzy weights with linear programming (FWLP). Based on the simulation and practical examples, we demonstrate that the proposed method has a lower error than the LP and FWLP methods, and it is further verified by the predictions. This paper includes five sections. After the "Introduction", the concepts and formulations of different models are explained in Section 2. The methodology of the proposed method is presented in Section 3 to obtain the premise and the consequent parameters in the fuzzy regression. In Section 4, two examples are used to illustrate the proposed procedure and its ability in providing more accurate predictions of uncertain outputs by means of this method. Of these two examples, one is a simulated example and the other is a case study in the field of turning process.

## 2. Basic Concepts and Methods

In this section, we briefly review the basic concepts of fuzzy regression, adaptive neuro-fuzzy inference system and genetic algorithm, respectively.

### 2.1 Fuzzy Regression

The function  $f(X)$  is a mapping from  $x$  to  $Y$ , where

$x_j = (x_{j0}, x_{j1}, \dots, x_{jp}) (j=1, 2, \dots, n)$  is a  $p$ -dimensional vector of the crisp-independent variable and the domain is assumed to be  $D \subseteq R^p$ . Consider the following fuzzy regression model:

$$Y = f(X) \{+\} \varepsilon = (l(x), a(x), r(x))_{LR} \{+\} \varepsilon. \quad (1)$$

$\varepsilon$  represents the regression error with conditional mean zero and variance  $\sigma^2(x)$  given  $x$ . In this paper, the response variable  $Y$  has a symmetric triangular fuzzy structure;  $Y_j$  can be written as  $Y_j = (a_j, \beta_j)$  where  $a_j$  and  $\beta_j$  are the center and the spread of a symmetric triangular fuzzy number, respectively, and  $\beta_j = r_j - a_j = a_j - l_j$ .

### 2.2. Linear Programming (LP) in Fuzzy Regression

In this work, we consider the following fuzzy regression model:

$$Y_j = p_0 + p_1x_1 + p_2x_2 + \dots + p_px_{jp} = pX_j, (j = 1, 2, \dots, n) \quad (2)$$

where,  $n$  is the number of data points,

$x_j = 1, x_{j1}, x_{j2}, \dots, x_{jp}$  is a  $p$ -dimensional input vector of the independent variables at the  $j^{th}$

observation,  $P = (p_0, p_1, \dots, p_p)$  is a vector of unknown fuzzy parameters, and  $Y_j$  is the  $j^{th}$  observed value of the dependent variables.  $P$  can be denoted in the vector form as  $P = \{b, \alpha\}$ , where  $b = (b_0, b_1, \dots, b_p)$   $\alpha = (\alpha_0, \alpha_1, \dots, \alpha_p)$ ,  $b_i$  is the center value, and  $\alpha_i$  is the spread value of,  $p_i, i = 0, \dots, p$  Also  $Y_j = (\alpha_j, \beta_j)$  is the symmetric triangular fuzzy number, where  $\alpha_j$  and  $\beta_j$  are the center and the spread of this number, respectively. Also the fuzzy regression parameters can be obtained by solving the following LP model [8]:

$$Min L = \sum_{j=1}^n \sum_{i=0}^p \alpha_i |x_{ji}| \tag{8}$$

Thus the following two constraints must be established:

$$\sum_{i=0}^p b_i |x_{ji}| - (1-h) \sum_{i=0}^p \alpha_i |x_{ji}| \leq \alpha_j - (1-h)\beta_j$$

$$\sum_{i=0}^p b_i |x_{ji}| - (1-h) \sum_{i=0}^p \alpha_i |x_{ji}| \geq \alpha_j + (1-h)\beta_j \tag{9}$$

In this model, the constrains assure that the support of the estimated values from the regression model includes the support of the observed values.

### 2.3. Genetic Algorithm (GA)

GA is a stochastic approach based on the principle of “survival of the fittest” and “natural selection”. GA belongs to the evolutionary algorithm family [17] applied to solve the optimization problems using the techniques based on natural evolution. In a complicated multi-dimensional search space, this algorithm is well-suited for finding the global optimal solution [18, 19]. The general GA procedure can be summarized as follows:

Step 1. The initial population is randomly generated and codified by chromosomes. They are represented as a vector of real numbers, of which, every entry is one of the unknown parameters of the problem.

Step 2. Each individual is evaluated in the population using a defined fitness function.

Step 3. In each iteration, each chromosome undergoes off-spring, cross-over, and mutation to produce a new population.

### 2.4. Adaptive Neuro-Fuzzy Inference System (ANFIS)

ANFIS is a famous hybrid technique that combines the adaptive learning capability of ANN along with the intuitive fuzzy logic of human reasoning. Thus the advantages of a fuzzy system

can be combined with a learning algorithm [20, 21]. It is one of the most popular fuzzy neural systems based on the concepts of fuzzy if-then rules [22].

In order to present the ANFIS model architecture, we consider four fuzzy if-then rules with two input variables and one output variable.

Rule 1: If  $x_1$  is  $A_1$  and  $x_2$  is  $A_3$ , then

$$f_1 = p_0^1 + p_1^1 x_1 + p_2^1 x_2$$

Rule 2: If  $x_1$  is  $A_1$  and  $x_2$  is  $A_4$  then

$$f_2 = p_0^2 + p_1^2 x_1 + p_2^2 x_2$$

Rule 3: If  $x_1$  is  $A_2$  and  $x_2$  is  $A_3$ , then

$$f_3 = p_0^3 + p_1^3 x_1 + p_2^3 x_2$$

Rule 4: If  $x_1$  is  $A_2$  and  $x_2$  is  $A_4$ , then

$$f_4 = p_0^4 + p_1^4 x_1 + p_2^4 x_2$$

where,  $x_1, x_2$ , and  $x_1, x_2$  and  $y \in R$  are the input and output variables, respectively,  $A_k$ 's are the fuzzy sets, and  $f_k$  represents the system output due to rule  $R_k$  ( $k = 1, 2, 3, 4$ ). In what follows, the five layers of the system that have 2D inputs and one output are explained. In the first layer, all the nodes are adaptive nodes that generate membership grades of the inputs. The node functions are given by:

$$o_{1,k} = \mu_{A,k}(x) \exp \left[ - \left( \frac{x_{j,i} - \tau_k}{2\sigma_k} \right)^2 \right], \tag{6}$$

$$k = 1, 2, 3, 4, i = 1, 2, j = 1, \dots, n$$

$o_{1,k}$  is the output of the  $k^{th}$  node of layer 1. In this work, the Gaussian membership function is considered. The  $\tau_k$  and  $\sigma_k$  parameters represent the center and the spread, respectively.

In the second layer, the nodes are also fixed. In this layer, the outputs can be calculated as follows:

$$o_{2k} = w_{jk} = \mu_{A_k}(x_{j1}) \cdot \mu_{A_k}(x_{j2}),$$

$$k = 1, 2, 3, 4, j = 1, \dots, n.$$

In the third layer, the nodes are fixed nodes. The outputs of this layer can be calculated as:

$$o_{3k} = \bar{w}_{jk} = \frac{w_{jk}}{\sum_{k=1}^4 w_{jk'}} \cdot \mu_{A_k}(x_{j1}) \cdot \mu_{A_k}(x_{j2}), \tag{7}$$

$$k = 1, 2, 3, 4 \quad j = 1, 2, \dots, n$$

This is called the normalized firing strength.

In the fourth layer, the node is an adaptive one. The association node function in this layer is

a linear function and the outputs can be represented as follows:

$$o_{4k} = \bar{w}_{jk} f_k = \bar{w}_{jk} p_i^k, \quad (10)$$

$$k = 1, 2, 3, 4 \quad i = 1, 2.$$

In this work,  $p_i^k$  is assumed to be a symmetric triangular fuzzy number.

In the fifth layer, the single node carries out the sum of the inputs of all the layers. The overall output of the structure can be expressed as:

$$o_{5k} = \sum_{k=1}^4 \bar{w}_{jk} f_k \quad (11)$$

### 3. Methodology of Proposed Method

In (11), assume that  $x_j = 1, x_{j1}, x_{j2}, \dots, x_{jp}$  is a p-dimensional input vector of the independent variables at the  $j^{th}$  observation. Also  $p = (p_0, p_1, \dots, p_p)$  a vector of unknown fuzzy parameters, and  $Y_i = (\alpha_{y,i}, \beta_{y,i})$  and  $\mathfrak{Y}_j = (\mathfrak{L}_{y,j}, \mathfrak{R}_{y,j})$  are the  $j^{th}$  observed value and the estimated value of the dependent variables for  $j = 1, 2, \dots, n$  where n is the number of data points,  $\alpha_{y,j}$  is the center value,  $\beta_{y,j}$  is the spread value of  $Y_j$ ,  $\mathfrak{L}_{y,j}$  is the center value, and  $\mathfrak{R}_{y,j}$  is the spread value of  $\mathfrak{Y}_j$ .

$p_i, i = 0, \dots, p$  can be denoted in the vector form as  $p_i = \{b, \alpha\}$  where  $b = (b_0^k, b_1^k, \dots, b_p^k)$  and  $\alpha = (\alpha_0^k, \alpha_1^k, \dots, \alpha_p^k)$   $k = 1, \dots, m$ , where  $b_i^k$  is the center value and  $\alpha_i^k$  is the spread value of  $p_i, i = 0, \dots, p$ . Thus from the above definitions, using the fuzzy arithmetic and substituting  $p_i^k$  into Eq. (11), it can be expressed as:

$$\mathfrak{Y}_j = \sum_{k=1}^m \sum_{i=0}^p b_i^k \bar{w}_{jk} x_{ji} + \sum_{k=1}^m \sum_{i=0}^p \alpha_i^k \bar{w}_{jk} x_{ji} \quad (12)$$

where,  $w_k$  is known.

#### 3.1 Premise and Consequence Parameters

In the proposed methods, the linear programming method (forward pass) is used to optimize the consequent parameters. Once the optimal consequent parameters are found, the gradient descent (backward pass) is used to optimize the premise parameters. For more details, see [20, 22].

In the proposed methods, the premise parameters are obtained by the ANFIS method for only the first part of Eq. (12). In what follows, the parameters obtained are optimized by GA. Then

the consequence parameters are obtained by solving the following LP model:

$$\min \sum_{j=1}^n \sum_{k=1}^m \sum_{i=0}^p \alpha_i^k \bar{w}_{jk} x_{ji}$$

so that the following constraints must be established:

$$\sum_{k=1}^m \sum_{i=0}^p b_i^k \bar{w}_{jk} x_{ji} - (1-h) \sum_{k=1}^m \sum_{i=0}^p \alpha_i^k \bar{w}_{jk} x_{ji} \leq a_{y_j} - (1-h) \beta_{y_j} \quad (13)$$

$$\sum_{k=1}^m \sum_{i=0}^p b_i^k \bar{w}_{jk} x_{ji} + (1-h) \sum_{k=1}^m \sum_{i=0}^p \alpha_i^k \bar{w}_{jk} x_{ji} \geq a_{y_j} + (1-h) \beta_{y_j} \quad (14)$$

and

$$\sum_{k=1}^m \sum_{i=0}^p \alpha_i^k \bar{w}_{jk} \geq 0, \quad i = 0, \dots, p,$$

$$k = 1, \dots, m, \quad j = 1, \dots, n$$

#### 3.2. Proposed Methods for Performance Evaluation

In order to evaluate the performance of the various methods, an error rate can be calculated as follows [5]:

$$ERROR = \frac{1}{n} \sum_{j=1}^n (Y_j - \hat{Y}_j) = \quad (15)$$

$$\frac{1}{n} \sum_{j=1}^n \left( 3 \left( a_{y_j} - \sum_{k=1}^m \sum_{i=0}^p b_i^k \bar{w}_{jk} x_{ji} \right)^2 + 2 \left( \beta_{y_j} - \sum_{k=1}^m \sum_{i=0}^p \alpha_i^k \bar{w}_{jk} x_{ji} \right)^2 \right)$$

Equation (15) is used as a quantity to measure bias between  $x_{j,s} (j = 1, 2, \dots, n)$  where

$l_j, a_j, r_j, \mathfrak{L}_j, \mathfrak{A}_j, \mathfrak{R}_j$  are the lower, center, and upper of the observed fuzzy outputs and lower, center, and upper of the estimated the observed values,  $Y_j = (l_j, a_j, r_j)$ , and the predicted values,

$\mathfrak{Y}_j = (\mathfrak{L}_j, \mathfrak{A}_j, \mathfrak{R}_j)$ , for all fuzzy outputs.

#### 3.3. Learning Algorithm for Forecasting Model

In order to forecast the model parameters, the steps taken can be summarized as follow:

Step 1: Divide all data into the two subsets of train and test data.

Step 2: Input value of  $\alpha$ .

Step 3: Obtain the premise parameters by the ANFIS method.

Step 4: Put the premise and consequent parameters obtained in a matrix  $p = xp_0$ , where

$$x \in [10^{-7}, 10^7]$$

Step 5: Optimize the premise parameters obtained by GA.

Step 6: Identify the consequent parameters by Eqs. (12), (13), and (14).

Step 7: Terminate the training of network when ERROR in Eq. (14) is smaller than a pre-defined small number or reaches a pre-defined epoch number; otherwise, go to step 4 and update the premise parameters.

Step 8: Evaluate the chosen net using the test data. In this work, we used the MATLAB software tool for coding.

#### 4. Numerical Examples

In order to demonstrate the applicability of the proposed algorithm, consider the following simulation and practical examples, and compare the results obtained from the different methods.

##### Example 1: Simulation Example

Consider the following functions:

$$f(x_1, x_2) = 24.23r^2(0.75 - r^2) + 5,$$

$$r^2 = (x_1/10 - 0.5)^2 + (x_2/10 - 0.5)^2.$$

Suppose that the domain of  $X = (x_1, x_2)$  is  $D = [0, 10]^2$ . A set of data is generated in the following manner.

The independent variables  $x_1$  and  $x_2$  are the crisp inputs. They are randomly taken from 0 to 10. Let the output  $Y_j = (a_j, \beta_j)$  ( $j=1, 2, \dots, n$ ) be a symmetric fuzzy number; it is generated as follows:

$$\begin{cases} a_j = f(x_{j1}, x_{j2}), \\ \beta_j = (1/4)f(x_j) + rand[0, 1], \end{cases} \quad j = 1, \dots, 30,$$

where,  $rand[a, b]$  denotes a random number between a and b for each j. We apply the different methods for fitting the regression model and use the error value ERROR numerically to evaluate the performance of the different methods. In what follows, the parameters obtained for using the FWLP method and the proposed method are, respectively, displayed in tables 1 and 2. Also the regression model obtained in the LP method is as follows:

$$\hat{Y}_j = (\hat{a}_j, \hat{\beta}_j) = (0.0744, 2.7036) + (1.4498, 0.2699)X_{j1} + (0.4007, 0.1173)X_{j2}$$

In tables 3 and 4, the results obtained for the different methods are summarized. It can be observed that the error value of the proposed method is lower than the error values of the other ones.

**Table 1. Premise and consequence parameters obtained using FWLP method.**

| Variable | k | $(\tau_k, \sigma_k)$ | $(b_0^k, \alpha_0^k)$ | $(b_1^k, \alpha_1^k)$ | $(b_2^k, \alpha_2^k)$ |
|----------|---|----------------------|-----------------------|-----------------------|-----------------------|
| $x_1$    | 1 | (4.5057, 1.5576)     | (5.3794, 0.7065)      | (1.6089, 0.4154)      | (-0.2687, 0.2711)     |
|          | 2 | (8.3810, 2.3388)     | (-1.5851, 0.7099)     | (1.8465, 0.5218)      | (0.6591, 0.0417)      |
| $x_2$    | 3 | (6.4446, 2.8907)     | (1.0780, 0.5292)      | (1.6831, 0.4525)      | (0.0664, 0.0352)      |
|          | 4 | (3.6626, 1.9964)     | (-24.3688, 0.8157)    | (4.9530, 0.2096)      | (-0.819, 0.2715)      |

**Tables 2. Premise and consequence parameters obtained using FWGALP method.**

| Variable | k | $(\tau_k, \sigma_k)$ | $(b_0^k, \alpha_0^k)$ | $(b_1^k, \alpha_1^k)$ | $(b_2^k, \alpha_2^k)$ |
|----------|---|----------------------|-----------------------|-----------------------|-----------------------|
| $x_1$    | 1 | (2.5012, 0.5197)     | (6.5359, 0.1967)      | (-3.5306, 0.1750)     | (2.2994, 0.6365)      |
|          | 2 | (0.0044, 1.6937)     | (-4.9901, 0.9352)     | (3.9159, 0.2645)      | (-0.0074, 0.0939)     |
| $x_2$    | 3 | (5.4523, 0.9135)     | (2.1379, 0.1523)      | (1.3080, 0.5804)      | (0.0867, 0.0869)      |
|          | 4 | (0.5245, 9.9232)     | (-0.7306, 1.6641)     | (1.5325, 0.4262)      | (0.4663, 0.0020)      |

**Table 3. Predicted fuzzy outputs using the different methods for Example 1.**


| k         | $x_1$  | $x_2$  | $Y_j = (\alpha_j, \beta_j)$ | $\hat{f}(x_j) = (\hat{\alpha}_j, \hat{\beta}_j)$ | $\hat{f}(x_j) = (\hat{\alpha}_j, \hat{\beta}_j)$ | $\hat{f}(x_j) = (\hat{\alpha}_j, \hat{\beta}_j)$ |
|-----------|--------|--------|-----------------------------|--|--|--|
|           |        |        |                             | LP   | FWLP   | FWGALP   |
| 1         | 6.6280 | 6.6090 | (11.6800,3.6280)            | (12.3319,5.2680)                                 | (11.6917,4.2428)                                 | (12.1123,4.5273)                                 |
| 2         | 9.2970 | 7.1810 | (16.9620,4.8400)            | (16.4306,6.0555)                                 | (16.9672,4.9535)                                 | (16.5294,5.7326)                                 |
| 3         | 3.1780 | 7.1450 | (7.7340,2.4680)             | (7.5450,4.3997)                                  | (8.0370,3.5867)                                  | (7.9595,2.9660)                                  |
| 4         | 1.1940 | 6.2100 | (3.9620,1.2360)             | (4.2940,3.7545)                                  | (4.5495,2.4290)                                  | (4.2726,1.8809)                                  |
| 5         | 3.9220 | 8.9840 | (9.7070,3.1400)             | (9.3606,4.8162)                                  | (9.0832,4.4044)                                  | (9.6829,3.2162)                                  |
| 6         | 2.6390 | 5.7270 | (7.2780,1.8480)             | (6.1953,4.0878)                                  | (6.7819,2.9067)                                  | (7.5075,3.0955)                                  |
| 7         | 9.7360 | 8.8430 | (17.8320,4.4820)            | (17.7331,6.3690)                                 | (17.9882,5.2545)                                 | (18.3095,5.8321)                                 |
| 8         | 3.7110 | 3.8310 | (6.9900,1.9900)             | (6.9897,4.1547)                                  | (7.2932,2.9339)                                  | (7.4215,2.8538)                                  |
| 9         | 2.8300 | 3.6310 | (5.8000,2.2370)             | (5.6323,3.8935)                                  | (5.8992,2.5099)                                  | (5.7987,2.2953)                                  |
| 10        | 7.1880 | 1.7980 | (11.4750,3.3530)            | (11.2159,4.8547)                                 | (11.4573,3.3884)                                 | (11.1235,4.7309)                                 |
| 11        | 6.3490 | 2.3940 | (9.5760,3.2770)             | (10.2383,4.6982)                                 | (9.5565,3.4622)                                  | (10.1175,4.3734)                                 |
| 12        | 1.3000 | 4.8520 | (4.1170,1.7250)             | (3.9034,3.6237)                                  | (4.0000,2.0636)                                  | (4.0663,1.8703)                                  |
| 13        | 0.5160 | 5.9760 | (3.2490,1.0740)             | (3.2172,3.5440)                                  | (3.1623,2.0436)                                  | (3.0905,1.4378)                                  |
| 14        | 7.5790 | 3.5590 | (12.3730,3.2320)            | (12.4884,5.1669)                                 | (12.1927,3.7952)                                 | (12.5236,4.8967)                                 |
| 15        | 1.0710 | 7.4820 | (4.4630,1.7000)             | (4.6254,3.8705)                                  | (4.6572,2.8348)                                  | (4.2931,2.0707)                                  |
| 16        | 7.1060 | 2.0840 | (11.2450,2.9840)            | (11.2116,4.8661)                                 | (11.1546,3.4413)                                 | (11.1315,4.6963)                                 |
| 17        | 5.2480 | 6.6670 | (10.1170,3.2140)            | (10.3545,4.9023)                                 | (10.4973,4.0892)                                 | (10.1407,3.8687)                                 |
| 18        | 2.9670 | 8.8280 | (6.7840,2.2730)             | (7.9135,4.5402)                                  | (7.6386,4.0518)                                  | (6.9088,2.6502)                                  |
| 19        | 3.6090 | 8.8930 | (8.9790,2.8670)             | (8.8703,4.7211)                                  | (8.6220,4.2868)                                  | (9.0138,2.9753)                                  |
| 20        | 3.9190 | 8.9900 | (9.3860,2.5520)             | (9.3586,4.8161)                                  | (9.0778,4.4053)                                  | (9.6804,3.2140)                                  |
| 21        | 5.6960 | 9.6320 | (12.0780,3.0950)            | (12.1921,5.3711)                                 | (11.6004,4.7585)                                 | (12.4900,4.1110)                                 |
| 22        | 3.1610 | 7.1270 | (8.0850,2.6180)             | (7.5131,4.3930)                                  | (8.0091,3.5741)                                  | (7.9339,2.9685)                                  |
| 23        | 5.8020 | 0.2170 | (8.9130,2.8190)             | (8.5729,4.2951)                                  | (8.8643,3.0698)                                  | (8.2620,4.1371)                                  |
| 24        | 0.8070 | 9.8370 | (4.8600,1.5760)             | (5.1863,4.0755)                                  | (3.9515,3.4784)                                  | (5.0551,2.0281)                                  |
| Test data |        |        |                             |  |  |  |
| 1         | 6.3490 | 2.6600 | (10.1150,2.8770)            | (10.3449,4.7294)                                 | (9.5709,3.5088)                                  | (10.2437,4.3725)                                 |
| 2         | 6.3490 | 2.3940 | (9.5760,3.2770)             | (10.2383,4.6982)                                 | (9.5565,3.4621)                                  | (10.1176,4.3736)                                 |
| 3         | 5.2480 | 6.6670 | (10.1170,3.2140)            | (10.3545,4.9023)                                 | (10.4973,4.0890)                                 | (10.1406,3.8686)                                 |
| 4         | 2.9670 | 8.8280 | (6.7840,2.2730)             | (7.9135,4.5402)                                  | (7.6383,4.0517)                                  | (6.9089,2.6504)                                  |
| 5         | 3.9190 | 8.9900 | (9.3860,2.5520)             | (9.3586,4.8161)                                  | (9.0775,4.4051)                                  | (9.6803,3.2140)                                  |
| 6         | 5.6960 | 9.6320 | (12.0780,3.0950)            | (12.1921,5.3711)                                 | (11.6002,4.7583)                                 | (12.4898,4.1110)                                 |

**Tables 4. Error results obtained using the different methods for Example 1.**

| Different methods | Value ERROR of train | Value ERROR of test |
|-------------------|----------------------|---------------------|
| LP                | 8.2812               | 8.8349              |
| FWLP              | 2.6819               | 4.2682              |
| FWGALP            | 1.9167               | 2.1179              |

**Example 2: Prediction of Diametral Error in Turning Process**

During turning the slender parts, the elastic deformation of the workpiece affects the dimensional accuracy of the workpiece [23-25]. A slender workpiece that clamped only in the chuck can be structurally regarded as a simple beam (Figure 1). As shown in this figure, the maximum deflection occurs at the free end of the workpiece, where the radial cutting force is acted. As a result of this deflection, the workpiece will have a non-uniform diameter, and the maximum deflection error occurs at the unsupported end of the workpiece (Figure 2).

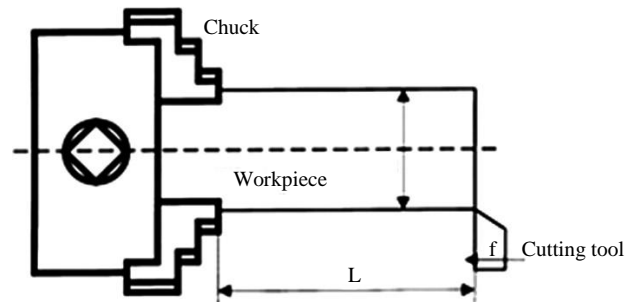

**Figure 1. Workpiece clamped by a chuck in turning [26].**

Figure 3 illustrates the diameter measurement positions along the workpiece, conducted by Bendaros *et al.* [23] after the longitudinal turning of a cylindrical part. Four different measurement positions along the axis of the workpiece were chosen at distances of 20, 70, 100, and 150 mm from the free end of the workpiece.

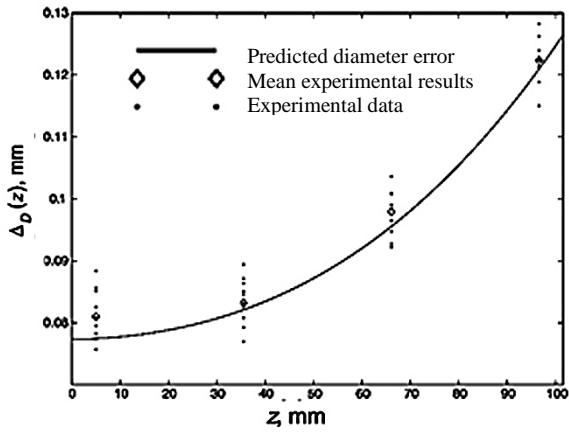


Figure 2. Diametral error of a workpiece clamped by a chuck in turning [27].

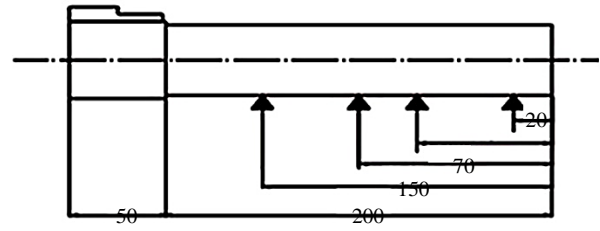


Figure 3. Diameter measurement positions after longitudinal turning of the workpiece [23].

Due to the uncertainty and non-uniformity associated with the diameter at each measurement position, three different diameter measurements were taken. Note that in table 6, the different observed measurements at each position are indicated as the fuzzy outputs.

Table 5. Premise and consequence parameters obtained using FWLP method for Example 2.

| $k$ | $(\tau_k, \sigma_k)$ | $(b_0^k, \alpha_0^k)$ | $(b_1^k, \alpha_1^k)$ |
|-----|----------------------|-----------------------|-----------------------|
| 1   | (42.7171, 58.0730)   | (51.1208, 0.0068)     | (0.1689, 0.0001)      |
| 2   | (149.2036, 52.7325)  | (-0.8580, 0.0060)     | (0.3229, 0.0001)      |

Table 6. Premise and consequence parameters obtained using FWGALP method for Example 2.

| $k$ | $(\tau_k, \sigma_k)$ | $(b_0^k, \alpha_0^k)$ | $(b_1^k, \alpha_1^k)$ |
|-----|----------------------|-----------------------|-----------------------|
| 1   | (149.0171, 12.2585)  | (0.3449, 0.0171)      | (0.3445, 0.0001)      |
| 2   | (29.1182, 54.1466)   | (52.0146, 0.0163)     | (-0.0003, 0.0002)     |

Table 7. Measured workpiece diameter and fuzzy outputs obtained using different methods for Example 2.

| K | $x_2$ | Diameter<br>$Y_j = (a_j, \beta_j)$ | $\hat{f}(x_j) = (\hat{a}_j, \hat{\beta}_j)$ |                   |
|---|-------|------------------------------------|---|-------------------|
|   |       |                                    | FWLP method                                 | FWGALP method     |
| 1 | 20    | (52.0085, 0.005)                   | (52.0087, 0.0088)                           | (52.0082, 0.0209) |
| 2 | 70    | (52.0050, 0.004)                   | (52.0059, 0.0136)                           | (51.9920, 0.0324) |
| 3 | 150   | (52.0120, 0.006)                   | (52.0141, 0.0211)                           | (52.0120, 0.0326) |
| 1 | 100   | (52.0120, 0.001)                   | (49.2536, 0.0164)                           | (51.9687, 0.0393) |

Table 8. Error results obtained using different methods for Example 2.

| Different methods | Value ERROR of train | Value ERROR of test |
|-------------------|----------------------|---------------------|
| FWLP              | 2.2844e-04           | 22.8271             |
| FWGALP            | 0.0013               | 0.0086              |

In order to fit the regression model for diameter measurements (Table 6), we apply the different methods. For the performance evaluation of the different methods, we use the ERROR value. The premise and the consequence parameters obtained are shown in tables 5 and 6. In what follows, we calculate the output  $\hat{Y} = (\hat{a}, \hat{\beta})$  for  $x = 100$  in the test dataset. For the FWGALP method,  $\hat{Y}$  can be calculated as follows:

At first,  $w_k$  is calculated for  $k = 1, 2$ . Using the premise parameters in table 6, and Eqs. (6) and (9), and  $x = 100$ ,  $w_k$  is equivalent to:

$$w_1 = \exp \left[ (-1/2) \left( \frac{100 - 149.0171}{12.2585} \right)^2 \right]$$

$$= 3.3732e - 04, w_2 = 0.4245, w_2 = 0.4245$$

and:

$$\sum_{k=1}^2 w_{18,k} = 3.3732e - 04 + 0.4245 = 0.4248$$

Therefore,

$$\bar{w}_1 = \frac{3.3732e - 04}{0.4248} = 7.9399e - 04$$

$$\bar{w}_2 = \frac{0.4245}{0.4248} = 0.9992, \bar{w}_2 = \frac{0.4245}{0.4248} = 0.9992$$

Finally, by substituting  $\bar{w}_k$  and the obtained consequence parameters  $(b_i^k, \alpha_i^k, k = 1, 2, i = 0, 1)$  (Table 6) in Eq. (12),  $\hat{Y}$  is computed as follows:

$$\hat{a} = (7.9399e - 04)(0.3449) + (7.9399e - 04)(0.3445)(100) + (0.9992)(52.0146) + (0.9992)(-0.0003)(100) = 51.8687$$

and:

$$\hat{\beta} = (7.9399e - 04)(0.0171) + (7.9399e - 04)(0.0001)(100) + (0.9992)(0.0163) + (0.9992)(0.0002)(100) = 0.0393$$

Thereupon,

$$\hat{Y} = (\hat{a}, \hat{\beta}) = (51.8687, 0.0393)$$

Also in the FWLP method,  $\hat{Y}$  is calculated as the FWGALP method.

The obtained results for the different methods are summarized in tables 7 and 8. Like the previous example, the proposed algorithm provides a better prediction than the FWLP method.

## 5. Conclusion

In this paper, we proposed an algorithm based on the neuro-fuzzy system, genetic algorithm, and linear programming (LP) in order to predict the fuzzy regression model. Also we used the simulation and case study examples to illustrate the applicability of the proposed algorithm in the case of crisp inputs and fuzzy output. We compared the results obtained for the different forecasting techniques. Using these results, a guideline could be proposed for selecting the appropriate regression method for predictive purposes. The main findings of this paper can be summarized as follow:

(1) Using the tables and the results obtained, we can see that the proposed method is stable. Based on the examples, the proposed method decreases the error values to a minimum level and is more accurate than the linear programming (LP) and fuzzy weights with linear programming (FWLP) methods.

(2) In the proposed method, the constrains used assure that the support of the estimated values from the regression model includes the support of the observed values in *the* h-level ( $0 < h \leq 1$ ). To sum up, in LP, the width of the estimated value depends on the

number of observations. As the number of observations increases, the width of the estimated value decreases.

(3) The proposed method is not more complicated than the FWLP method in computations but is more accurate.

(4) The results obtained from the simulated example and the case study in the field of turning process show that the presented method is especially useful for practical problems, which involve some degree of uncertainty, inhomogeneity, randomness, and imprecision in the output data.

## References

- [1] Zhang, C. & Guo, P. (2018). FLFP: A fuzzy linear fractional programming approach with double-sided fuzziness for optimal irrigation water allocation. *Agricultural Water Management*, vol. 199, pp.105–119.
- [2] Tanaka, H., Uejima, S. & Asia, K. (1982). Linear regression analysis with fuzzy model, *IEEE Transactions on Systems, Man and Cybernetics*, vol. 12, pp. 903-907.
- [3] Kumar, A., Kaur, J. & Singh P. (2011). A new method for solving fully fuzzy linear programming problems. *Applied Mathematical Modelling*, vol. 35, no. 2, pp. 817-823.
- [4] Lotfi, F. H. T., Allahviranloo, M., Jondabeh, A. & Alizadeh, L. (2009). Solving a full fuzzy linear programming using lexicography method and fuzzy approximate solution. *Applied Mathematical Modelling*, vol. 33, pp.3151–3156.
- [5] Goudarzi, F. K., Nasseri, S. H. & Taghnezhad, N. A. (2020). A new interactive approach for solving fully fuzzy mixed integer linear programming problems. *Yugoslav Journal of Operations Research*, vol. 30, no. 1, pp.71-89.
- [6] Diamond, P. (1988). Fuzzy least squares. *Information Sciences*, vol. 46, no. 3, pp.141-157.
- [7] Tanaka, H. (1987). Fuzzy data analysis by possibilistic linear models. *Fuzzy Sets and Systems*, vol. 24, no. 3, pp.363-375.
- [8] Tanaka, H., Hayashi, I. & Watada, J. (1989). Possibilistic linear regression analysis for fuzzy data. *European Journal of Operational Research*, vol. 40, no. 3, pp. 389-396.
- [9] Danesh, S., Farnoosh, R., Razzaghnia & T. (2016). Fuzzy nonparametric regression based on adaptive neuro-fuzzy inference system. *Neurocomputing*. vol. 173, pp. 1450-1460.
- [10] Razzaghnia, T., Danesh, S. & Maleki, A. (2011). Hybrid fuzzy regression with trapezoidal fuzzy data. *Proc. Fourth International Conference on Machine*



Vision (ICMV 2011): Machine Vision, Image Processing, and Pattern Analysis, Singapore, 2011.

[11] Razzaghnia, T. & Danesh, S. (2015). Nonparametric Regression with Trapezoidal Fuzzy Data. *International Journal on Recent and Innovation Trends in Computing and Communication (IJRITCC)*, vol. 3, no. 6, pp. 3826 – 3831.

[12] Danesh, S. (2018). Fuzzy Parameters Estimation via Hybrid Methods. *Hacettepe Journal of Mathematics and Statistics*, vol. 47, no. 6, pp. 1605 – 16244.

[13] Razzaghnia T. & Pasha, E. (2009). A new mathematical programming approach in fuzzy linear regression models. *Applied Mathematical Sciences*, vol. 18, no. 70, pp50-59.

[14] AL-Othman, A.K. (2009). A fuzzy state estimator based on uncertain measurements. *Measurement*, vol. 42, no. 4, pp. 628-637.

[15] Ali, M., Deo, R. C., Downs, N. J. & Maraseni T., An ensemble-ANFIS based uncertainty assessment model for forecasting multi-scalar standardized precipitation index. *Atmospheric Research*, vol. 207, no. 15, 2018, pp. 155-180.

[16] Danesh, M., Danesh, S. & Khalili K. (2019). Multi-Sensory Data Fusion System for Tool Condition Monitoring Using Optimized Artificial Fuzzy Inference System. *Mechanics Aerospace Journal*, vol. 15, no. 2, pp. 103-118.

[17] Fogel, D.B. (1995). *Evolutionary computation: toward a new philosophy of machine intelligence*. New York, IEEE Press, pp. 87-121.

[18] DeJong, K. (1988). Learning with genetic algorithms: an overview. *Mach Learn* 3, pp. 121–138.

[19] Goldberg, DE. (1989). *Genetic algorithms in search, optimization, and machine learning*, Addison-Wesley, pp.1-15.

[20] Jang, J. S. R. (1992). Self-learning fuzzy controllers based on temporal back-propagation. *IEEE Transactions on Neural Network*, vol. 3, pp. 714-723.

[21] Jang, J. S. R. (1993). ANFIS: adaptive-network-based fuzzy inference system. *IEEE Trans Syst Man Cyber*, vvol. 23, no. 3, pp. 665-685.

[22] Takagi, T. & Sugeno, M. (1985) Fuzzy identification of systems and its application to modelling and control. *IEEE Transactions on Systems, Man and Cybernetics*, vol. 15, pp. 116-132.

[23] Benardos, P. G., Mosialos, S. & Vosniakos, G.C. (2006). Prediction of workpiece elastic deflections under cutting forces in turning. *Robotics and Computer-Integrated Manufacturing*, vol. 22, pp. 505–514.

[24] Danesh, M. & Khalili, K. (2015). Determination of Tool Wear in Turning Process Using Undecimated Wavelet Transform and Textural Features. *Procedia Technology*, vol.19, pp. 98-105.

[25] Khalili, K. & Danesh, M. (2015). Identification of vibration level in metal cutting using undecimated wavelet transform and gray-level co-occurrence matrix texture features, *Proceedings of the Institution of Mechanical Engineers, Part B: Journal of Engineering Manufacture*, vol. 229, pp. 205-213.

[26] Qiang, L.Z. (2000). Finite difference calculations of the deformations of multi-diameter workpieces during turning. *Journal of Materials Processing Technology*, vol. 98, pp. 310–316.

[27] Phan, A.V., Baron, L., Mayer, J.R.R. & Cloutier, G. (2003). Finite element and experimental studies of diametral errors in cantilever bar turning. *Applied Mathematical Modelling*, vol. 27, pp. 221–232.